
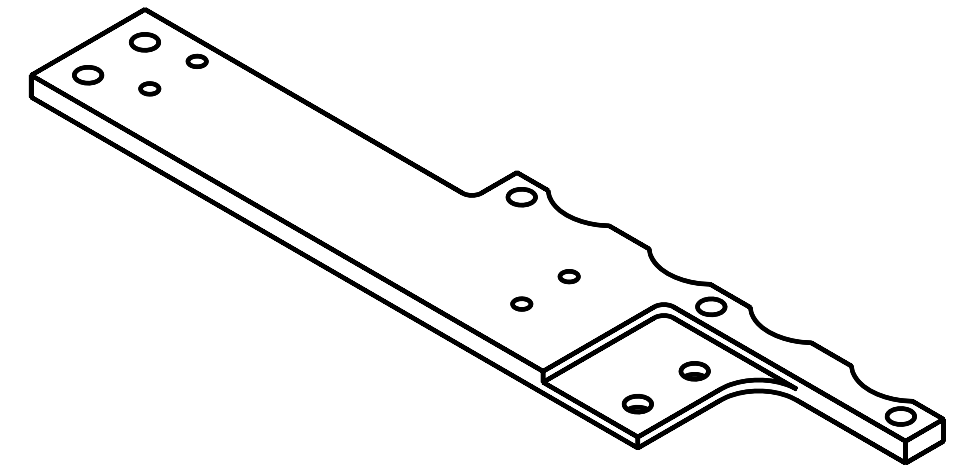


REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	09/17/12	MRASCON

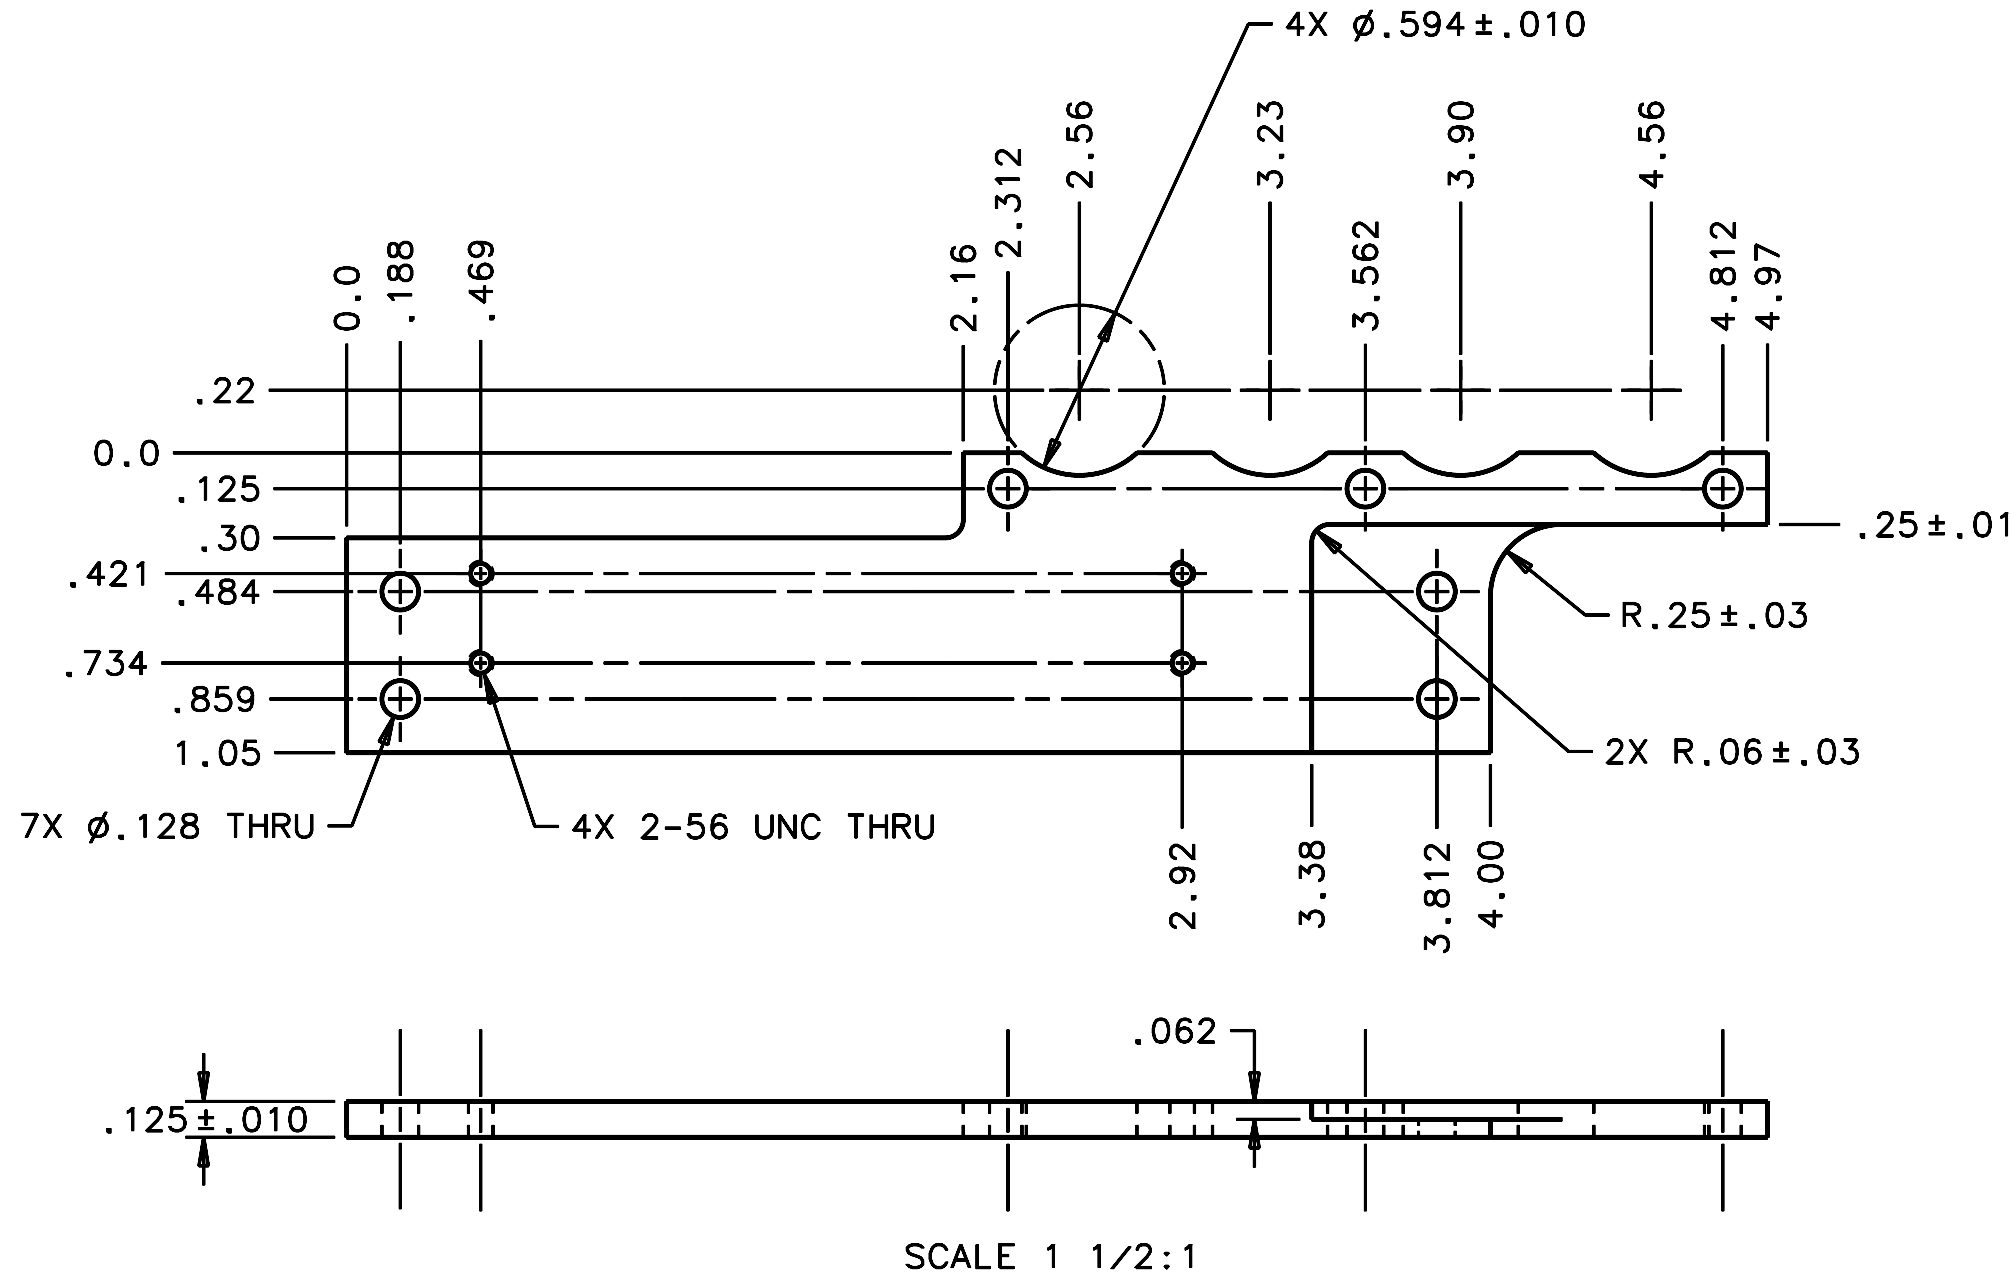

NOTES: UNLESS OTHERWISE SPECIFIED

1. BREAK SHARP EDGES & DEBURR.
2. MACHINED SURFACE FINISH TO BE 125 RMS OR BETTER.
3. MACHINED FILLETS TO BE R.015 MAX.
4. ANODIZE PER MIL-A-8625, TYPE II, CLASS 2, BLACK.
5. DIMENSIONS ARE BEFORE ANODIZING.

DO NOT SCALE DRAWING INTERPRET DIMENSIONS AND TOLERANCES IN ACCORDANCE WITH ASME Y14.5M-94		THIS DRAWING CREATED IN: ACAD <input type="checkbox"/> MECH <input type="checkbox"/> IDEAS <input checked="" type="checkbox"/>		Steward Observatory, University of Arizona 933 N. Cherry Avenue, Tucson, AZ 85721 (520)621-7659			
TOLERANCES UNLESS OTHERWISE SPECIFIED LINEAR ANGULAR .X - .01 .XX - .02 .XXX - .005 DIAMETRICAL SEE SPEC S-002				DESIGNED BY: RNAGY	DATE: 09/13/12	CATEGORY: MMT	
				DRAWN BY: RNAGY	09/13/12	PROJECT: MAESTRO	
				CHECKED BY: RNAGY/MRASCON	09/17/12	TITLE: INJECTION OPTICS SLIT DISK CARRIAGE SLIDE INTERFACE MOUNT	
				APPROVED: MRASCON	09/17/12		
MATERIAL 6061-T6 Al		23001 MAESTRO		APPROVED:		PLOT SIZE B	SCALE: SEE VIEWS
FINISH 4		NEXT ASSY USED ON		APPROVED:		DRAWING NUMBER: 22943	REVISION: A
		ASSEMBLY APPLICATION		CURRENT TIME/DATE/FILE LOCATION: - DRAWING ARCHIVE LOCATION: http://devinci.cs.arizona.edu/ocod/default.html			