
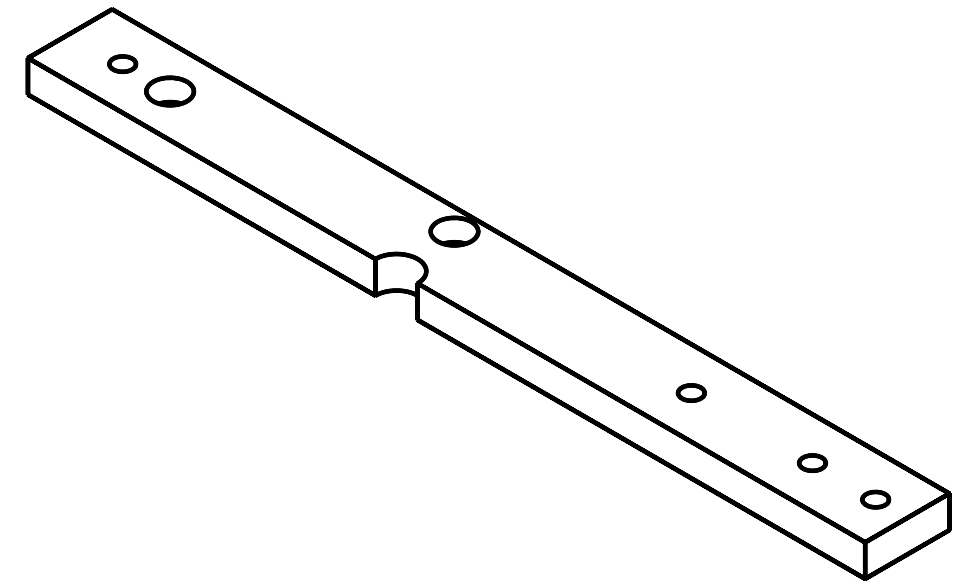


REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	09/17/12	MRASCON

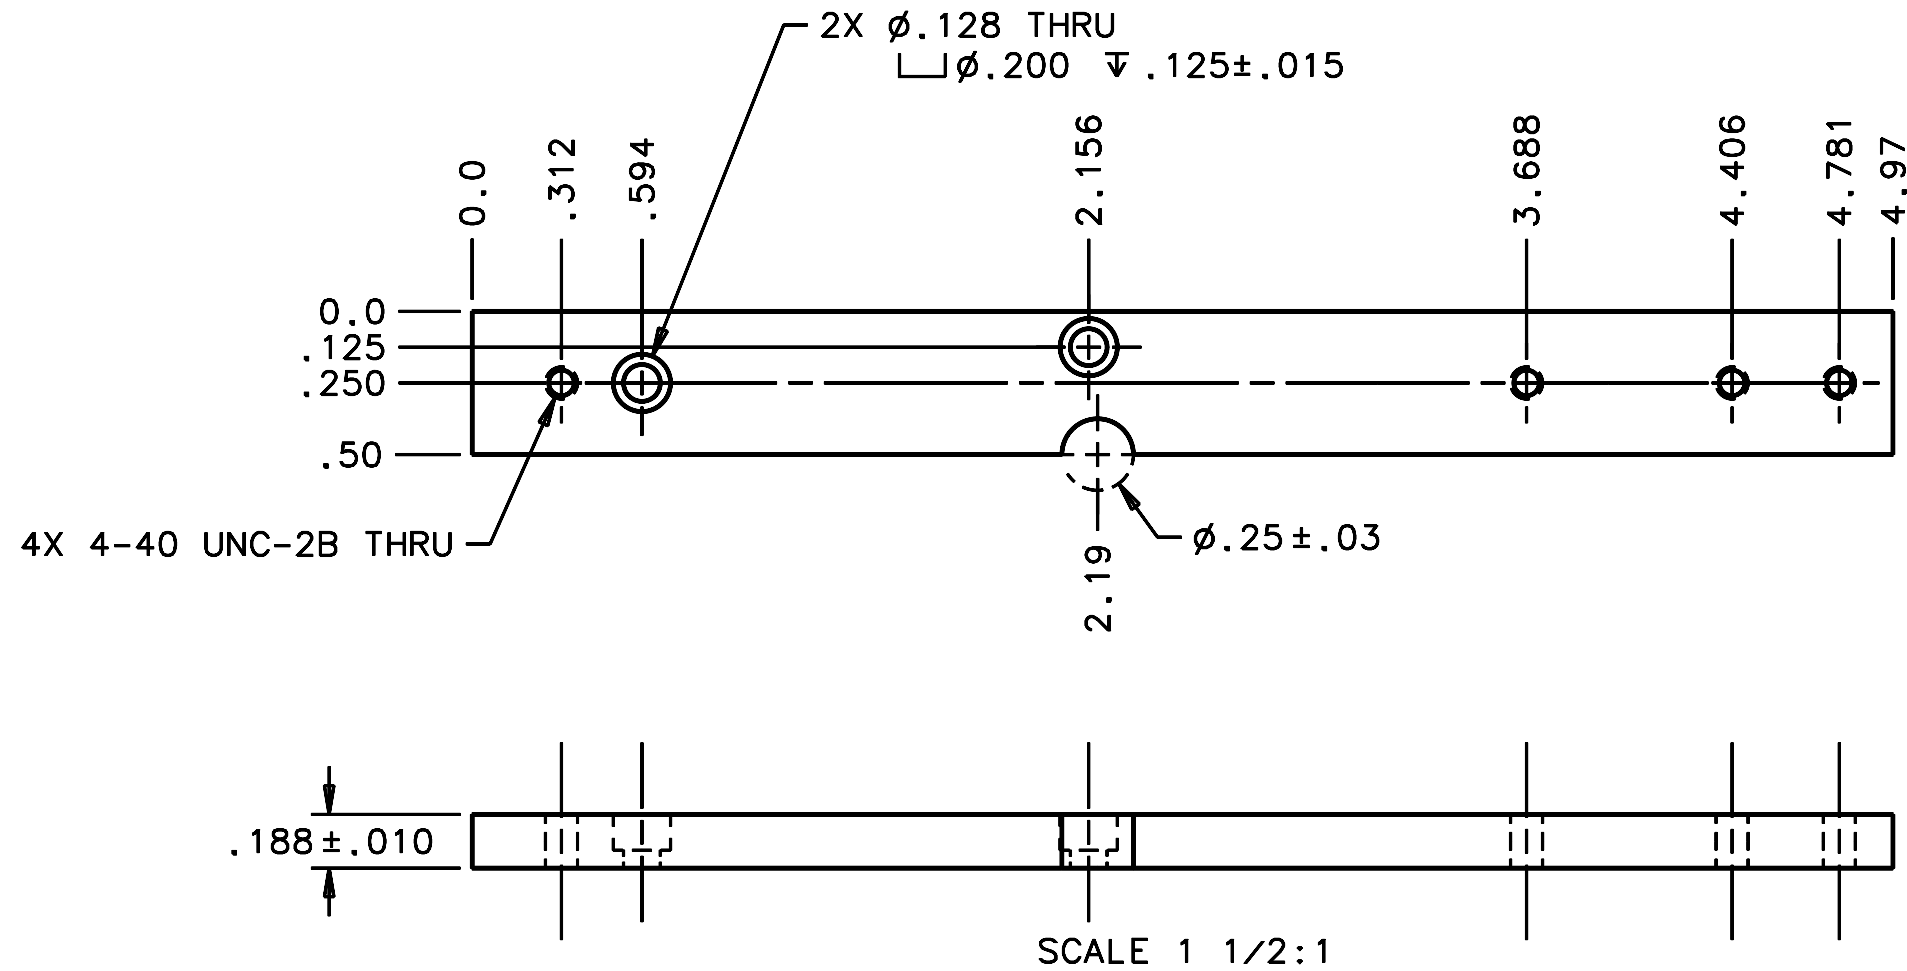

NOTES:

1. BREAK SHARP EDGES & DEBURR.
2. MACHINED SURFACE FINISH TO BE 125 RMS OR BETTER.
3. MACHINED FILLETS TO BE R.015 MAX.
4. ANODIZE PER MIL-A-8625, TYPE II, CLASS 2, BLACK.
5. DIMENSIONS ARE BEFORE ANODIZING.

DO NOT SCALE DRAWING INTERPRET DIMENSIONS AND TOLERANCES IN ACCORDANCE WITH ASME Y14.5M-94		THIS DRAWING CREATED IN: ACAD <input type="checkbox"/> MECH <input type="checkbox"/> IDEAS <input checked="" type="checkbox"/>		Steward Observatory, University of Arizona 933 N. Cherry Avenue, Tucson, AZ 85721 (520)621-7659			
TOLERANCES UNLESS OTHERWISE SPECIFIED LINEAR      ANGULAR .X      - MA      ±1° .XX      - .03 .XXX     - .005		MATERIAL 6061-T6 Al		DESIGNED BY: RNAGY		DATE: 09/13/12	
DIAOMETRICAL SEE SPEC S-002		FINISH <b>4</b>		DRAWN BY: RNAGY		CATEGORY: MMT	
MATERIAL 6061-T6 Al		NEXT ASSY USED ON		CHECKED BY: RNAGY/MRASCON		PROJECT: MAESTRO	
FINISH <b>4</b>		ASSEMBLY APPLICATION		APPROVED: MRASCON		TITLE: INJECTION OPTICS SLIT DISK CARRIAGE SLIDE MOUNT	
FINISH <b>4</b>		ASSEMBLY APPLICATION		APPROVED:		PLOT SIZE B	
FINISH <b>4</b>		ASSEMBLY APPLICATION		APPROVED:		SCALE: SEE VIEWS	
FINISH <b>4</b>		ASSEMBLY APPLICATION		APPROVED:		DRAWING NUMBER: 22946	
FINISH <b>4</b>		ASSEMBLY APPLICATION		APPROVED:		REVISION: A	
FINISH <b>4</b>		ASSEMBLY APPLICATION		CURRENT TIME/DATE/FILE LOCATION: -		SHEET 1 OF 1	
FINISH <b>4</b>		ASSEMBLY APPLICATION		DRAWING ARCHIVE LOCATION: <a href="http://devinci.cs.arizona.edu/ocod/default.html">http://devinci.cs.arizona.edu/ocod/default.html</a>		SHEET 1 OF 1	