
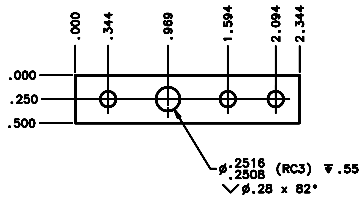



REVISIONS				
LTR	DESCRIPTION	DATE	REVIEWED BY	APPROVED
A	INITIAL RELEASE	03/28/04	J. DEAN	G. LANDIS

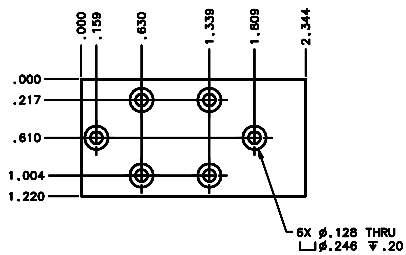

SCALE 2:1

NOTES:

- BREAK SHARP EDGES & DEBURR.
- MACHINED SURFACE FINISH TO BE 125 RMS OR BETTER.
- MACHINED FILLETS TO BE .015 MAX.
- ANODIZE PER MIL-A-8625, TYPE II, CLASS 2 - BLACK.
- ALL DIMENSIONS APPLICABLE BEFORE ANODIZING.

DO NOT SCALE DRAWING		THIS DRAWING CREATED IN:		Steward Observatory, University of Arizona	
TOLERANCES UNLESS OTHERWISE SPECIFIED ARE IN ACCORDANCE WITH FIG. 114, 114-04		<input type="checkbox"/> ASAP <input type="checkbox"/> MICH <input checked="" type="checkbox"/> TIGAR		833 N. Cherry Avenue, Tucson, AZ 85721 (520)621-7856	
TOLERANCES		DESIGNED BY: D. DEAN		DATE: 06/21/04	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DECIMALS    .015" FRACTIONS    1/16" ANGLES       1/2°		DRAWN BY: G. LANDIS		DATE: 06/21/04	
MATERIAL		APPROVED BY: M. REED		DATE: 06/21/04	
AL ALLOY 6061-T6		14174		MMT-MAESTRO	
FINISH		NEXT ASSY		USED ON	
4					
ASSEMBLY APPLICATION		COMPANY TOLERANCES/PLATE LOCATION		PART OR JOB CODE	
				D -	
				14169	
				REVISION	
				A	
					SHEET 1 OF 1