
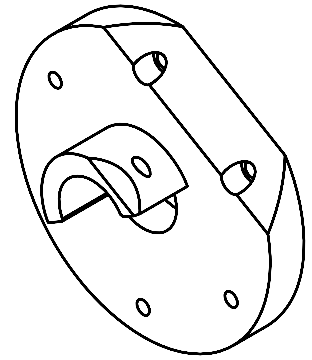


REVISIONS				
LTR	DESCRIPTION	DATE	REVIEWED BY	APPROVED
A	INITIAL RELEASE	03/28/04	J. BROWN	G. LANDIS

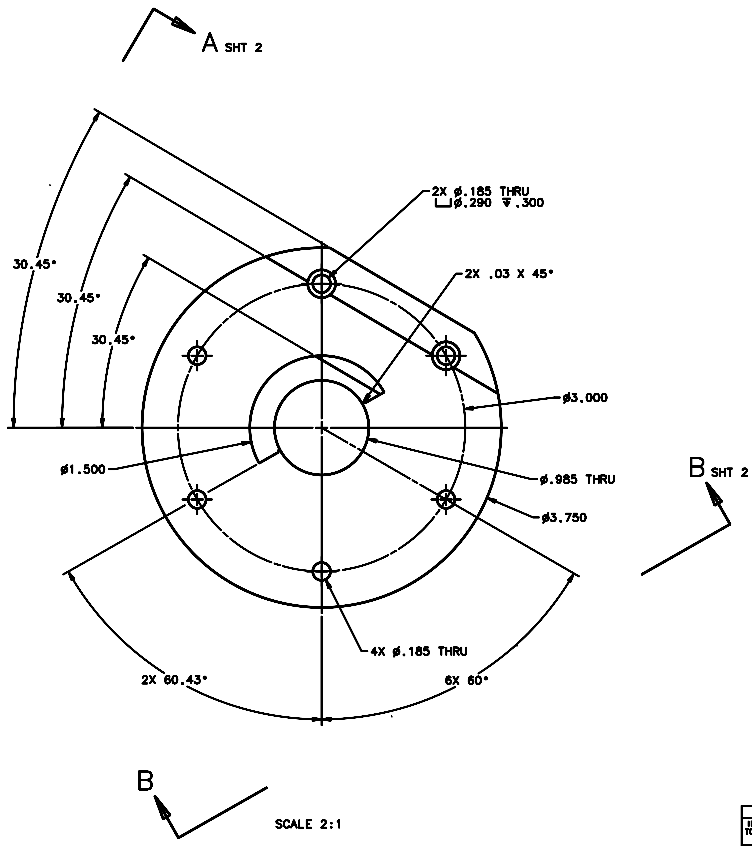

- NOTES:
1. BREAK SHARP EDGES & DEBURR.
 2. MACHINED SURFACE FINISH TO BE 125 RMS OR BETTER.
 3. MACHINED FILLETS TO BE .015 MAX.
 - 4 ANODIZE PER MIL-A-8625, TYPE II, CLASS 2 - BLACK.
 5. ALL DIMENSIONS APPLICABLE BEFORE ANODIZING.

DO NOT SCALE DRAWING		THIS DRAWING CREATED IN:		Steward Observatory, University of Arizona	
TOLERANCES UNLESS OTHERWISE SPECIFIED ARE IN ACCORDANCE WITH FIG. 11.10-04		ASAP	ISO	933 N. Cherry Avenue, Tucson, AZ 85721 (520)621-7850	
TOLERANCES		ASAP	ISO	DATE: 06/21/04	PROJECT: MMT
UNLESS OTHERWISE SPECIFIED		DATE BY: D. DEAN	DATE: 06/21/04	PROJECT: MAESTRO	
LINES		DATE BY: G. LANDIS	DATE: 06/21/04	TITLE: GUIDE CAMERA FILTER PORT	
APPROVED BY: G. LANDIS		DATE: 06/21/04	DATE: 06/21/04	OPTICAL LENS CAN MOUNT	
APPROVED BY: M. NEED		DATE: 06/21/04	DATE: 06/21/04	PLAT BY: BODAI	DRAWING NUMBER: 14172
MATERIAL: AL ALLOY 6061-T6		14174	MMT-MAESTRO	REVISION: D	REVISION: A
FINISH: 4		NEXT ASSY USED ON:	ASSEMBLY APPLICATION:	COMPANY TOLERANCE/PLATE LOCATION:	SHEET 1 OF 2