REVISIONS				
LTR	DESCRIPTION	DATE	REVISED BY	APPROVED
A	INITIAL RELEASE	03/29/05	J. BREHMAN	G. LANDIS

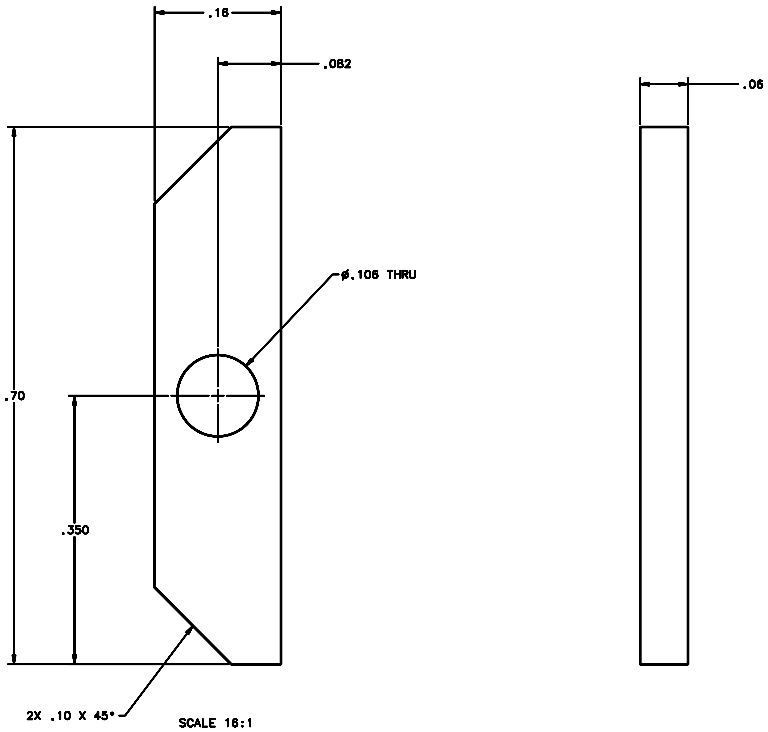

NOTES:
1. BREAK SHARP EDGES & DEBURR.
2. MACHINED SURFACE FINISH TO BE 125 RMS OR BETTER.
3. ANODIZE PER MIL-A-8625, TYPE II, CLASS 2 - BLACK.
4. ALL DIMENSIONS APPLICABLE BEFORE ANODIZING.

DO NOT SCALE DRAWING INTERPRET DIMENSIONS AND TOLERANCES IN ACCORDANCE WITH ASME Y14.5M-94 TOLERANCES UNLESS OTHERWISE SPECIFIED LINEAR: .X ± ±, .XX ± 0.05, .XXX ± 0.005 ANGULAR: ± 1° DIMENSIONAL SEE SPEC S-002	THIS DRAWING CREATED IN: ACAD ☐ MECH ☐ IDEAS ☒	Steward Observatory, University of Arizona 933 N. Cherry Avenue, Tucson, AZ 85721 (520)621-7659	
		DESIGNED By: D. DEAN — DATE: 09/27/04	CONTRACT: MMT
		DRAWN By: R. ABALDO — 09/27/04	PROJECT: MAESTRO
		CHECKED By: G. LANDIS — 09/27/04	TITLE: SLIT HOLDER ASSY STOP BLOCK
		APPROVED: M. REED — 09/27/04	
MATERIAL AL ALLOY 6061-T6	14268 — MMT-MAESTRO NEXT ASSY — USED ON	APPROVED:	PLOT SIZE: D — SCALE: - — DRAWING NUMBER: 14261 — REVISION: A
FINISH 3	ASSEMBLY APPLICATION	CURRENT TIME/DATE/FILE LOCATION: DRAWING ARCHIVE LOCATION: http://workref.as.arizona.edu/mmt/slit1.html	SHEET 1 OF 1