
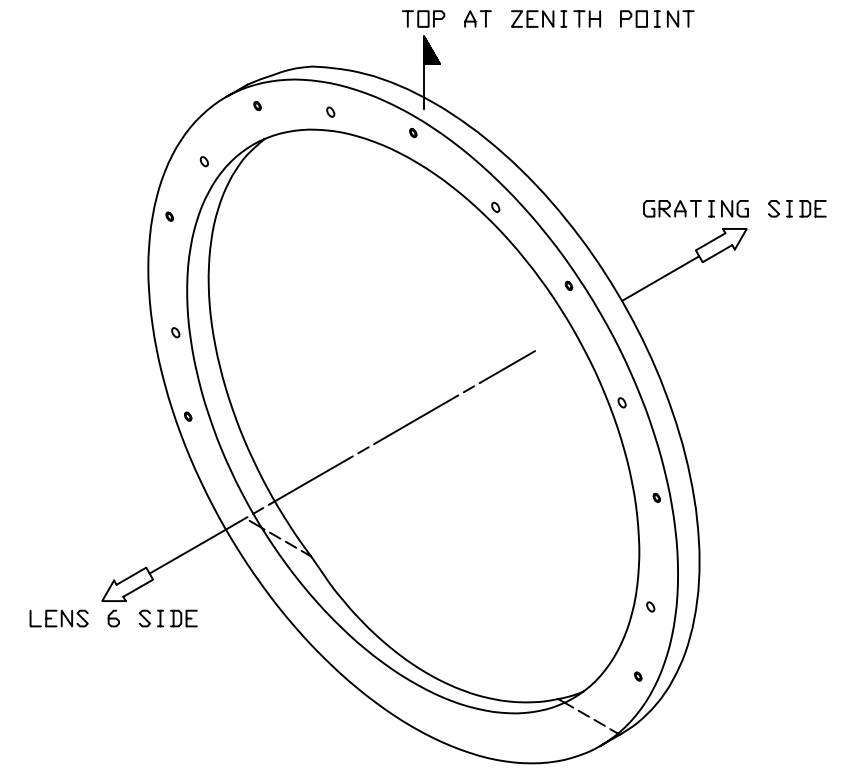
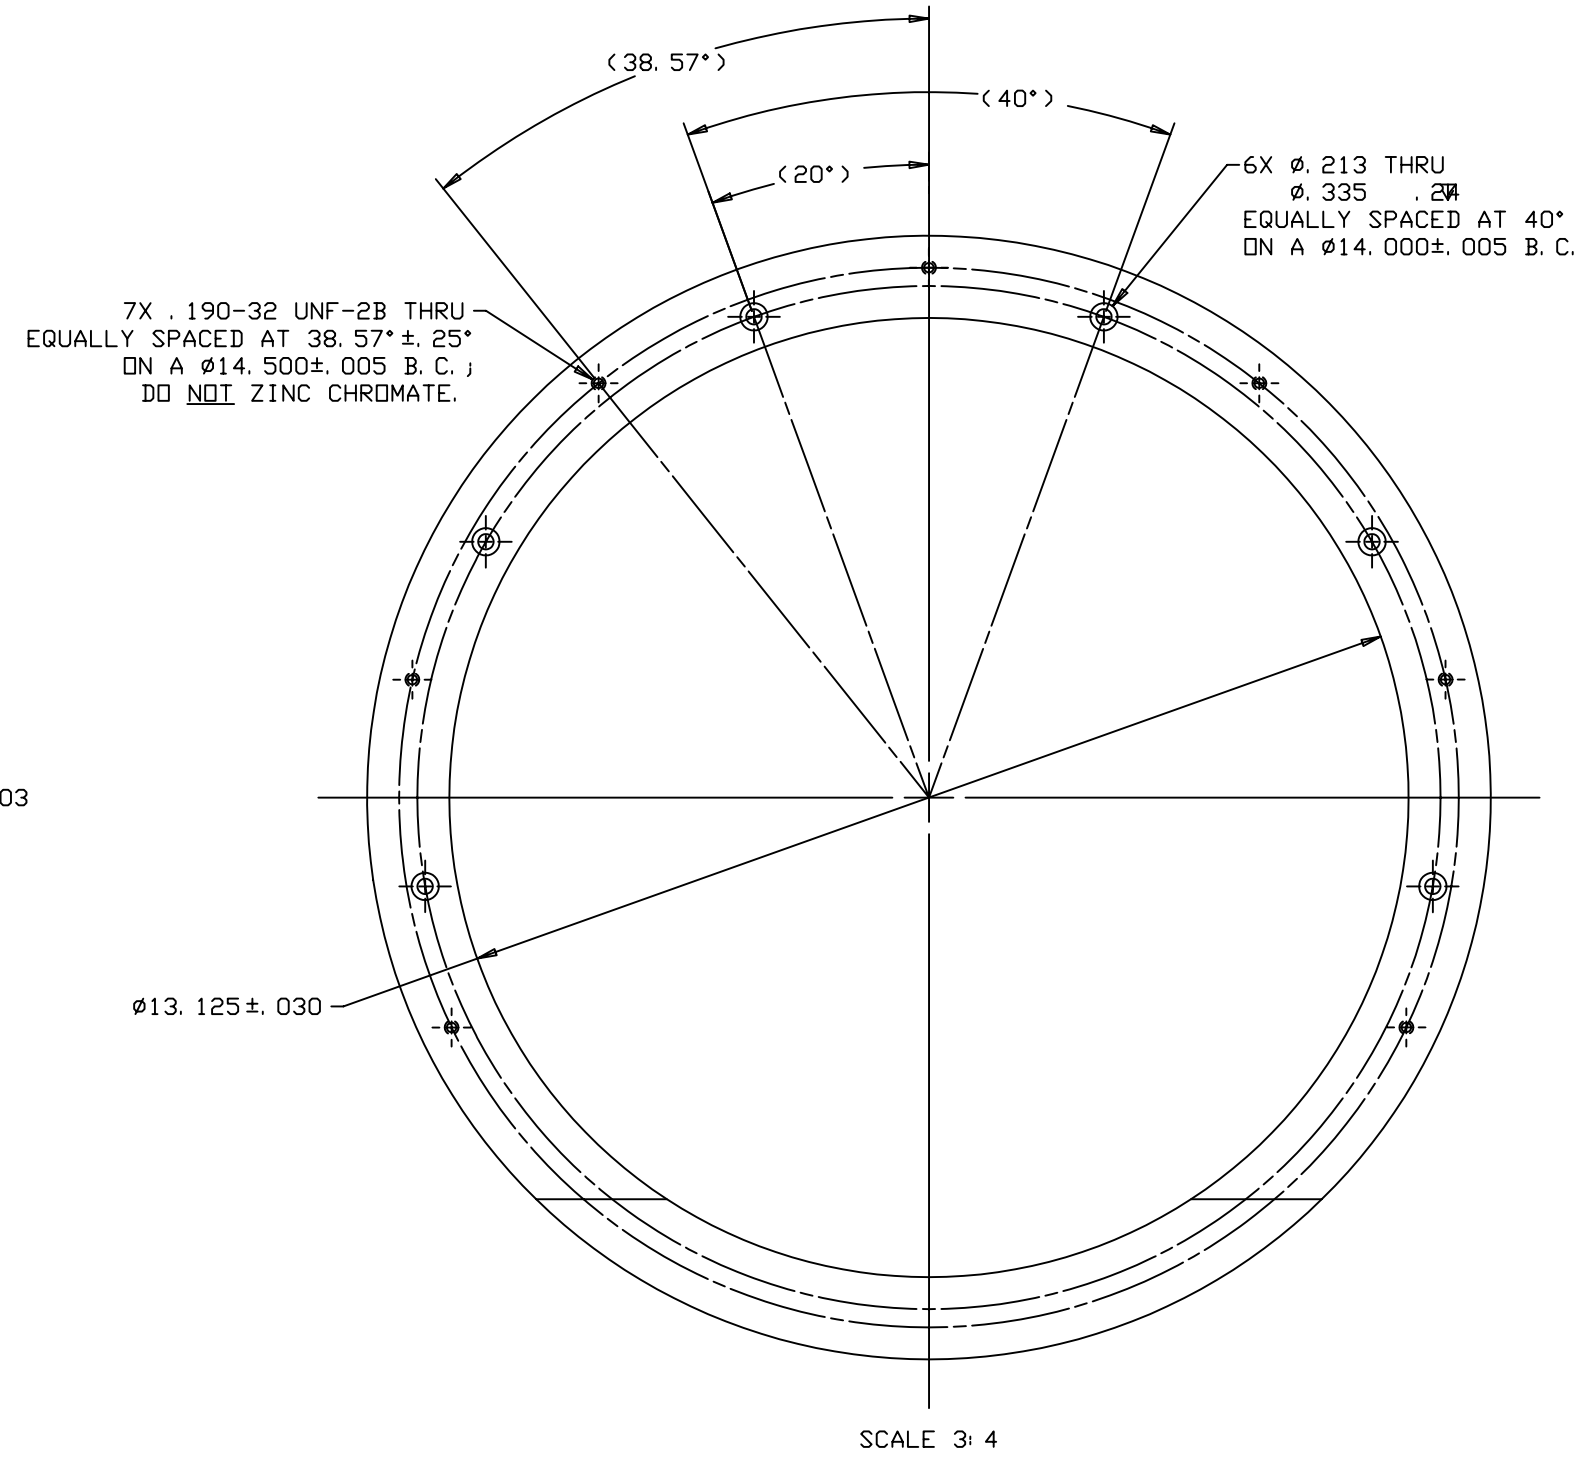


REVISIONS				
LTR	DESCRIPTION	DATE	REVISED BY	APPROVED
A	INITIAL RELEASE	8/2/04	R. NAGY	B. CUERDEN

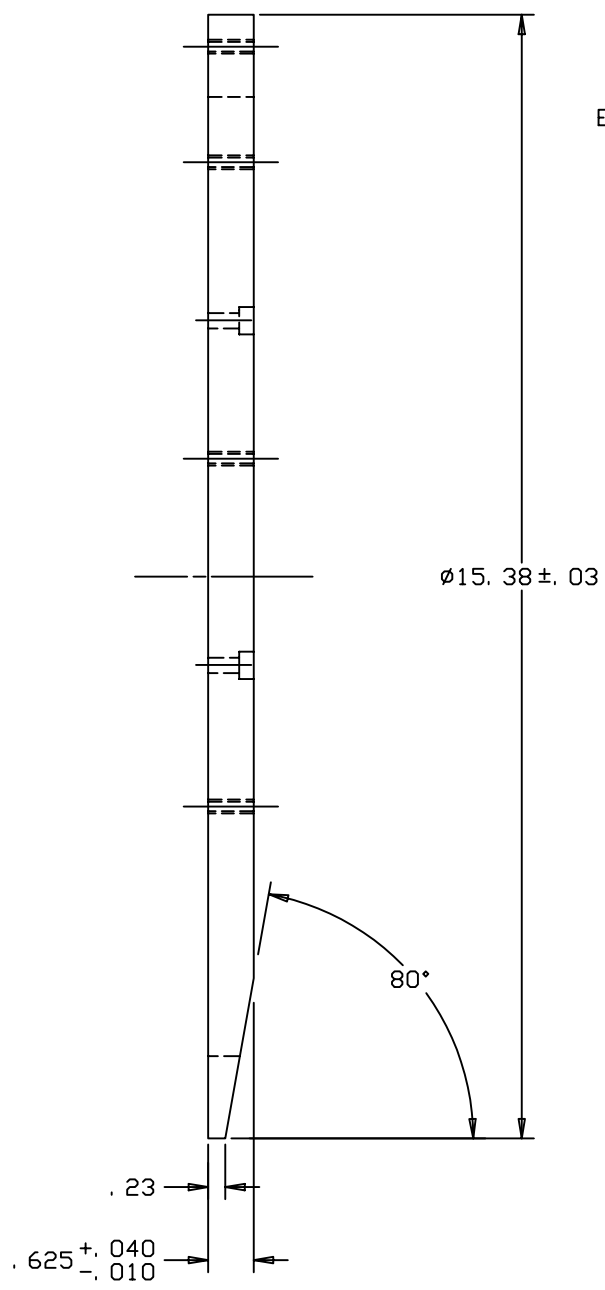

- NOTES:
1. BREAK SHARP EDGES & DEBURR.
 2. MACHINED SURFACE FINISH TO BE 125 RMS OR BETTER.
 3. ZINC CHROMATE SC-2 PER ASTM-B-633-98, TYPE II, BLACK. PLUG ALL THREADED HOLES.
 4. DIMENSIONS ARE BEFORE ZINC CHROMATE.

DO NOT SCALE DRAWING		THIS DRAWING CREATED IN:		Steward Observatory, University of Arizona 933 N. Cherry Avenue, Tucson, AZ 85721 (520)621-7659			
INTERPRET DIMENSIONS AND TOLERANCES IN ACCORDANCE WITH ASME Y14.5M-94		ACAD	MECH	IDEAS	DESIGNED BY: B. CUERDEN/D. DEAN	DATE: 3/5/04	CATEGORY: MMT
TOLERANCES UNLESS OTHERWISE SPECIFIED LINEAR .XX = ±.03 .XXX = ±.005 ANGULAR 1"		<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	DRAWN BY: R. NAGY	3/12/04	PROJECT: MAESTRO
DIA METRICAL SEE SPEC S-002					CHECKED BY: G. LANDIS	7/26/04	TITLE: PRISM CELL PRISM FLEXURE RING MOUNTING FLANGE
MATERIAL INVAR 36 ALLOY		13285	MMT		APPROVED: B. CUERDEN	8/2/04	
FINISH 3		NEXT ASSY	USED ON		APPROVED: M. REED	8/2/04	
ASSEMBLY APPLICATION		CURRENT TIME/DATE/FILE LOCATION:		PLOT SIZE: SCALE:		DRAWING NUMBER:	REVISION:
		DRAWING ARCHIVE LOCATION: http://devinci.as.arizona.edu/scad/default.html		D -		13700	A
							SHEET 1 OF 1